

LSQ5


Luminous Square | 5"

LUMOS

Architectural Lighting



LUMINOUS SQUARE WITH
360° SEAMLESS BRILLIANCE

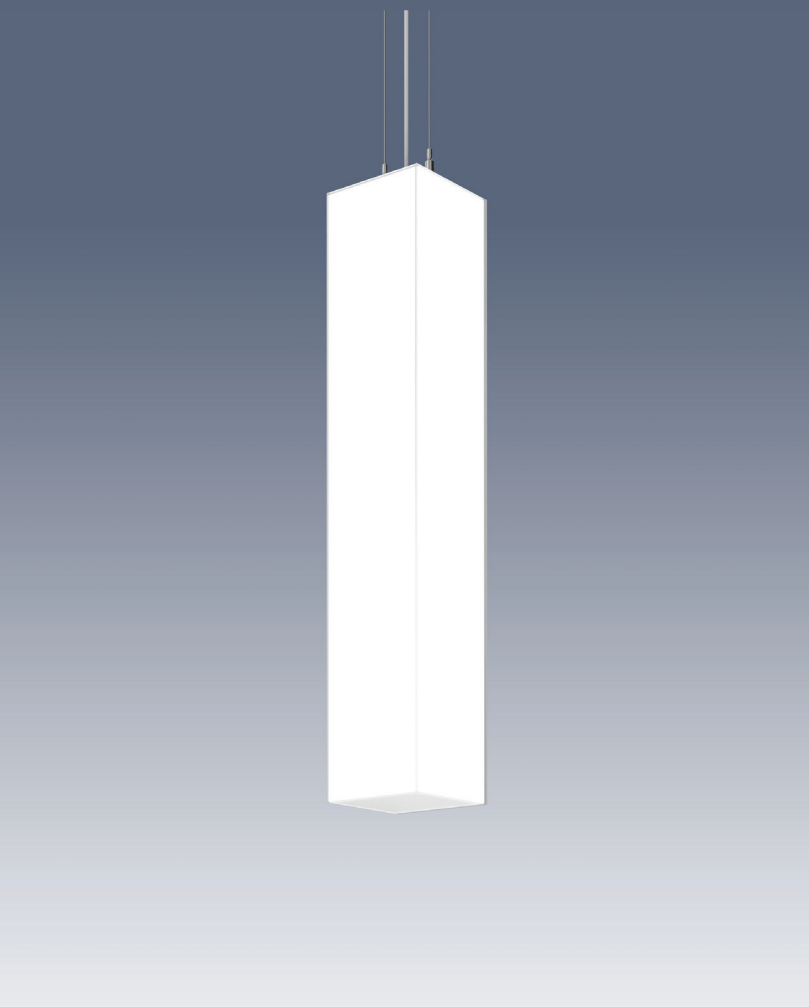

Features

- Size:** 5"
- Output:** 120 LPW
- Lens:** White acrylic square tube; 12"-96" (nominal)
- Mounting:** Cable or rigid stem
- Driver:** Inside canopy or remote
- Weight:** 4 lb/ft
- Certification:** UL listed for damp location use
- Warranty:** 5-year limited warranty
- Photometry:** Third-party photometric report and IES files on the website

- Downlight options available
- Mounting for multi-square clusters
- RGB+W in standard lumen output range
- Aesthetic option for finished trim



Project: _____ Type: _____ Date: _____

Order: _____

Example: LSQ5 - 60 - SO - 940 - DIM - AC15 - BLK - BCC - CTM - DNL3-W

Order Guide



Lens (in)	Lumen Output	LED	Driver	Mounting	
12	SO standard 2775 lm/ft	Static White	DIM 0-10 V/1%	Aircraft Cable Pendant	
24					
36	MD modify lumens and watts (5% increments up to 2775 lm - consult factory)	830 CRI >80 3000°K	DIM.1 0-10 V/.1%	AC10 100" adjustable cable	
48		835 CRI >80 3500°K	TRC TRIAC/ ELV	AC15 150" adjustable cable	
60		840 CRI >80 4000°K	DAL DALI	AC20 200" adjustable cable	
72		930 CRI >90 3000°K	DMX Digital Multiplex (consult factory)	CCN multi-square cluster with 100" adjustable cables & custom canopy (consult factory for required submittals)	
84		935 CRI >90 3500°K	Dynamic White	DIM, DIM.1, DAL, DMX drivers rated 120-277 VAC. TRC drivers rated 120 VAC.	Stem
96		940 CRI >90 4000°K			
		TW tunable white 700-6500°K		STMX rigid stem X= stem length; specify in 6-inch increments (max stem length = 96")	
		WD warm dim 2200-3500°K			
		Red, Green, Blue + White			
		RGBW30 RGB+W 3000°K			
		RGBW35 RGB+W 3500°K			
		RGBW40 RGB+W 4000°K			
		(consult for TW, WD & RGB+W)			

Optional Finish	Canopy Cord Finish	Options	Downlight Options																																							
<p>Powder Coat</p> <p>Applied to stem (STM), decorative corner trim (CTM) when specified</p> <p>WHT matte white</p> <p>BLK matte black</p> <p>ASL anodized silver</p> <p>GRY matte gray (RAL 7035)</p> <p>RALX matte RAL color X=code (specify)</p> <p>CCL custom color (provide chip)</p> <p>Luminous Wood Grain</p> <p>LWG1 ash</p> <p>LWG2 teak</p> <p>LWG3 walnut</p> <p>LWG4 zebrawood</p>	<p>Powder Coat</p> <table border="1"> <thead> <tr> <th>Standard</th> <th>Canopy Color</th> <th>Cord Color</th> </tr> </thead> <tbody> <tr> <td>WCC</td> <td>white</td> <td>white</td> </tr> <tr> <td>BCC</td> <td>black</td> <td>black</td> </tr> <tr> <td>SCC</td> <td>silver</td> <td>silver</td> </tr> <tr> <td>MBC</td> <td>white</td> <td>silver</td> </tr> <tr> <td>RAL</td> <td></td> <td></td> </tr> <tr> <td>RCW</td> <td>RALX</td> <td>white</td> </tr> <tr> <td>RCB</td> <td>RALX</td> <td>black</td> </tr> <tr> <td>RCS</td> <td>RALX</td> <td>silver</td> </tr> <tr> <td>Custom</td> <td></td> <td></td> </tr> <tr> <td>CCW</td> <td>CCL</td> <td>white</td> </tr> <tr> <td>CCB</td> <td>CCL</td> <td>black</td> </tr> <tr> <td>CCS</td> <td>CCL</td> <td>silver</td> </tr> </tbody> </table>	Standard	Canopy Color	Cord Color	WCC	white	white	BCC	black	black	SCC	silver	silver	MBC	white	silver	RAL			RCW	RALX	white	RCB	RALX	black	RCS	RALX	silver	Custom			CCW	CCL	white	CCB	CCL	black	CCS	CCL	silver	<p>RMT remote driver</p> <p>BBU remote battery back up with remote driver</p> <p>CTM ½" corner trim (specify finish)</p>	<p>Module* Beam Spread</p> <p>DNL1 1,125 lm 10 W</p> <p>DNL2 2,032 lm 20 W</p> <p>After choosing module, specify beam spread</p> <p>S narrow 15°</p> <p>M medium 35°</p> <p>W wide 50°</p> <p>*module dims to 5%</p>
Standard	Canopy Color	Cord Color																																								
WCC	white	white																																								
BCC	black	black																																								
SCC	silver	silver																																								
MBC	white	silver																																								
RAL																																										
RCW	RALX	white																																								
RCB	RALX	black																																								
RCS	RALX	silver																																								
Custom																																										
CCW	CCL	white																																								
CCB	CCL	black																																								
CCS	CCL	silver																																								

