

RP-DN-EXT

order sequence information

RP-DN-EXT

1 2 3 4

EXAMPLE RP-DN-EXT- 48 4000 WHT SPC

1	CAT NO.	DESCRIPTION	DELIVERED LUMENS
	RP-DN-EXT-24	24" diameter,	3,020 lumens, 37 watts
	RP-DN-EXT-36	36" diameter,	4,534 lumens, 56 watts
	RP-DN-EXT-48	48" diameter,	6,062 lumens, 74 watts
	RP-DN-EXT-60	60" diameter,	7,578 lumens, 93 watts
	RP-DN-EXT-72	72" diameter,	9,094 lumens, 111 watts
	RP-DN-EXT-84	84" diameter,	10,609 lumens, 130 watts

- Drivers are integral, Class 2 constant current, 120-277 volt, and include two wire 0 -10v dimming, 1-100%.
- Delivered lumen output values can be programmed to lower values than shown in 5% increments.

2 LED COLOR TEMP

3000	3000°K CRI >80
3500	3500°K CRI >80
4000	4000°K CRI >80

RGB + WHITE LED COLOR TEMP

RGB + white LED includes a DMX decoder for connecting to a DMX control system. White LED output is equal to the delivered lumens for the model listings shown.

RGB/3000	Red, green, blue and 3000°K LEDs
RGB/3500	Red, green, blue and 3500°K LEDs
RGB/4000	Red, green, blue and 4000°K LEDs

3 COLOR

WHT	Matte white powder coat
GRY	Matte gray (RAL7035) powder coat
ASL	Anodized silver powder coat
BLK	Satin black powder coat
RAL	Specify 4 digit RAL color number

- Non-chromate undercoat with Tiger Drylac Series 38 exterior grade acrylic powder coat.

4 MOUNTING

CMT Ceiling mount.

SPC Single point canopies with one power canopy.
• 24, 36, and 48 diameter rings have 3 canopies and cables. 60, 72 and 84 inch diameter rings have six canopy and cable sets. Standard cable length is 100". Longer cables available. No power cord provided. Specify cord size to be used. • For stabilizing the lateral movement of the ring under certain conditions, contact the factory for optional cabling designs.

Catenary suspension. Contact factory.

exterior ring downlight

PROJECT:

TYPE:

DATE:




Housing: Formed aluminum. Drivers are internal to the fixture. Liquid tight vent plugs for heat dissipation and ventilation of fixture. Stainless steel, liquid tight cord grips. All hardware is stainless steel.

Lens: High transmissive frosted acrylic. Gasketed to the housing.

Certification: IP66, suitable for wet location use.

Warranty: 5 year limited warranty.

- All fixtures ship in one piece.

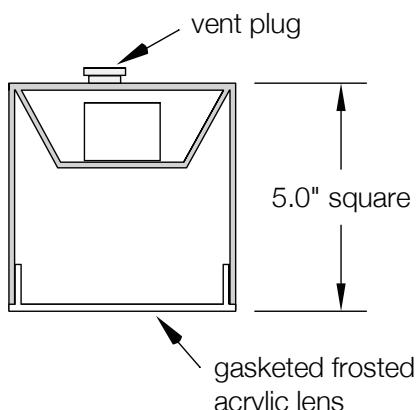

L U M O S

Denver, Colorado www.lumoscustom.com